

# Composite covers for roads, parkings and service stations





- Anti-slip surface
- Secure
- Lockable
- Lightweight composite materials
- Corrosion resistant
- Eliminates rattling noises
- Suitable for public road installations



# Composite manhole covers

Available in Class B125, C250 and D400

## B125



Model	SLB2318	SLB2323(C)	SLB3131	SLB2346 DF	SLB3163 DF
Clearance (mm)	600 x 450	600 x 600	800 x 800	600 x 1.200	800 x 1.600
Weight cover (kg)	10	12	21	2 x 12	2 x 21


\* B125 covers are standard provided with an aluminum frame

\* B125 covers are also available as vented cover

\* SLB2323 is available with a composite frame (SLB2323C)



SLB2346 DF



B125 covers are available in a double frame with removable beam.  
On demand, multiple frames are available to cover larger areas.

## C250



SLC4200DC



SLC3600

Model	SLC3600(DC)	SLC4200(DC)
Clearance (mm)	Ø 900	Ø 1.060
Weight cover (kg)	31	40
Glass fiber skirt	SKI 0036	SKI 0042
Concrete slab (with anti-slip profile)	CONSLAB 36	CONSLAB 42
Dimensions concrete slab (mm)	1450 x 1450 x 200	1600 x 1600 x 200

C250 covers are standard provided with a gasket and can be provided with a central dip hole (DC).


MwayPro Composite Covers



# For roads, parking and service stations


**D400**

Model	SLD2424	SLD2723L	SLD2300L	SLD3000L	SLD3600L	SLD4200L
Clearance (mm)	610 x 610	700 x 600	Ø 600	Ø 760	Ø 900	Ø 1.060
Weight cover (kg)	29	31	28	36	46	51



Except for the SLD2424 cover, all D400 covers are provided with a stainless steel lock and can be equipped with a sealing gasket.


## Options

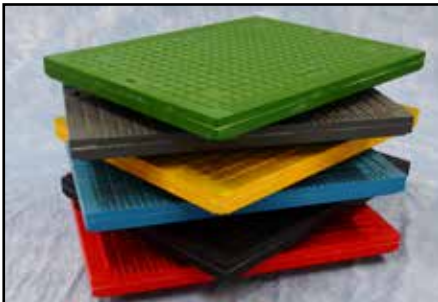

Standard colour: black.  
Other colours and company logos/inscriptions optional (subject to quantities)




An optional gasket ensures water, air and gas tightness and eliminates potential odour propagation

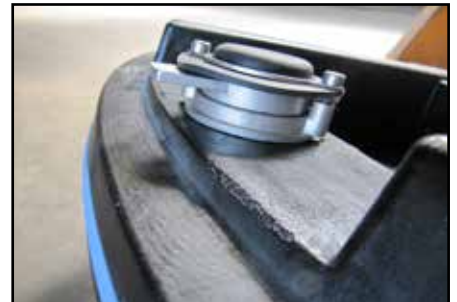

Stainless steel lock to prevent theft and unauthorised opening (standard on D400 covers)



A steel safety grid can be installed in the cover opening to prevent falling into the opening

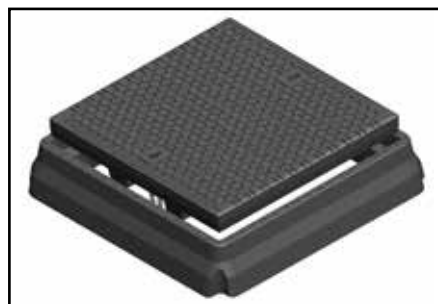

The SLD2424 is available with a Pressure Relief function and opens when the pressure rises above 0.5 bar

MwayPro Composite Covers



# MwayPro unique characteristics

## Material

Advanced fiberglass composite

## Noiseless in traffic

The material and unique shape of the frame prevent the cover from rocking, eliminating all rattling noises typical for cast iron covers



## Lightweight

3 times lighter than steel covers  
4 times lighter than concrete covers  
Single person removal, preventing risks of physical injury



## Secure

Cover material has no intrinsic value  
Lockable for theft prevention  
Eliminates risks of injury to the public  
Self-extinguishing when fire source is removed  
Thermally and electrically non-conductive

## Anti-slip

Significantly more grip compared to iron, steel and other composite covers, in wet as well as in dry road surface conditions



## Durable

Low wear characteristics  
Lockable, preventing theft and tampering  
Longer life expectancy than iron, steel and other composite covers  
15 year warranty on thread pattern



## Low maintenance

Self-cleaning watertight seal  
Easy, single person removal

## Corrosion resistant

Sand and salt resistant  
15 year warranty against corrosion



CGH Belgium nv  
Rijksweg 10 C  
B- 2880 BORNEM  
Tel.: +32 (0)3 459 80 76  
E-mail: info@cghbelgium.com

[www.cghbelgium.com](http://www.cghbelgium.com)

MwayPro General Overview - EN - 20180403  
Non-contractual document